

Lab-Guard Series



Lab-Guard Series

Scope of Application

The Lab-Guard ULT freezer can be used for the storage and protection of temperature sensitive samples, vaccines, longitudinal study samples, important medical research samples, valuable pharmaceutical products, clinical trial samples.


■ Safer by Design



Slim cabinet design for better access



World leading energy saving



World-famous Components



Fast Cabinet Pull Down



Superior temperature recover time



VIP PLUS design



MD-86L458



MD-86L458T



Safe and Reliable Samples Storage

Superior temperature uniformity; Imported world-famous components.



Double Door Design

Four independent / detachable inner door allows better samples management. And each inner door has gasket which will reduce heat exchange rate and retaining the inner temperature better.



Multi-level Alarms

Alarm functions include high, low temperature, sensor error, power failure, high ambient alarm, door open alarm.



Optimized Refrigeration System

High efficiency cooling fans and compressors, combined with hydrocarbon refrigerants, ensure energy savings and long-term sample security.



MD-86L458

1 Multi-layer Sealing Structure

Multi-layers gaskets provide a tight seal between the inner doors and outer door, reducing heat exchange rate and retaining the inner temperature better when there is power failure.

2 VIP PLUS Design

Provides up to 30% more storage capacity than a conventionally insulated freezer, without increasing the footprint. A glass fibre core provides advanced thermal properties.

3 USB Port

Enables users to download historical temperature data for compliance/auditing purposes.

4 LED Display

Alarm functions include high, low temperature, sensor error, power failure, high ambient alarm, door open alarm.



5 Lever Handle Design

Ingenious handle design helps you easy to open and close door easier. Lockable handle safeguards your precious samples. Padlock can also be added for extra sample safety.

6 Heated Pressure Equalization Port


It allows users to re-open the main door quickly when entering, rust-proof, freeze-free.

7 Narrow Door Design


The freezer can pass through an 750mm wide door when the door is open.

TYPICAL PERFORMANCE CHARACTERISTICS AT 25° C AMBIENT


Temperature recover curve

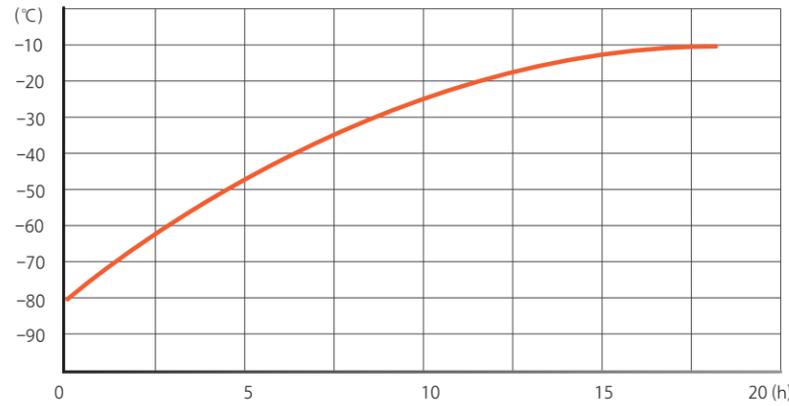

Temperature cool down curve

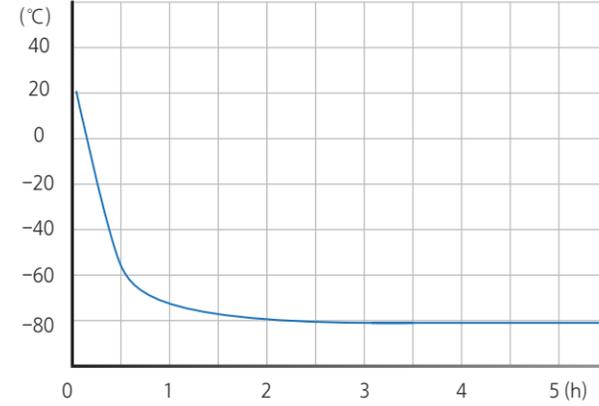

Temperature uniformity

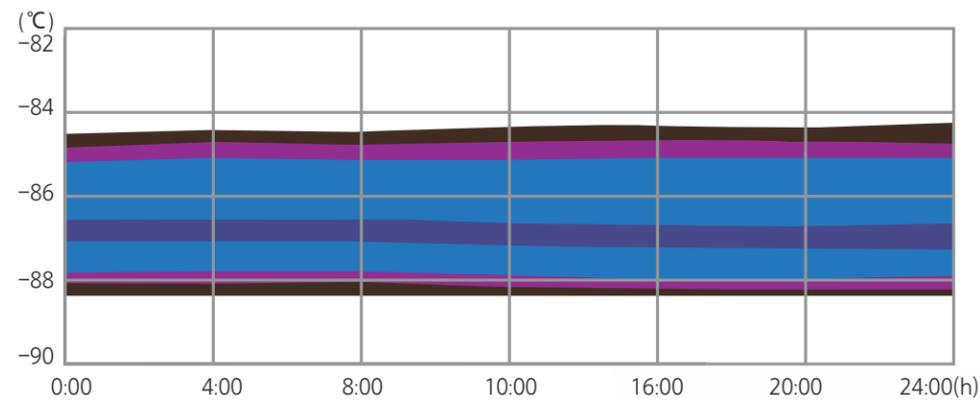

Item	Model No.	MD-86L458	MD-86L458T
Product Image	Product Image		
Technical Data	Cabinet Type	Upright	Upright
	Climate Class	N	N
	Cooling Type	Direct cooling	Direct cooling
	Defrost	Manual	Manual
	Cooling System	Mixed refrigerant	Mixed refrigerant
	Refrigerant	458	458
	Total Storage Volume(L)	32000	32000
	2ml Cryo Tube Qty	High quality coated steel	High quality coated steel
	External Material	Stainless steel	Stainless steel
	Inner Material	Microprocessor	Microprocessor
Control	Controller	LED	Touch Screen
	Display	0.1	0.1
	Temperature Accuracy(°C)	-40 ~ -86°C	-40 ~ -86°C
	Temperature Range	885*855*1990	885*855*1990
Dimensions	Product Dimensions(mm)(wxdxh)	595*580*1310	595*580*1310
	Interior Dimensions(mm)(wxdxh)	220~240V /50 HZ	220~240V /50 HZ
Electrical Data	Power Supply	Y	Y
Functions	High Temperature Alarm	Y	Y
	Low Temperature Alarm	Y	Y
	Door Ajar	Y	Y
	Power Failure Alarm	Y	Y
	High condenser temperature alarm	Y	Y
	High ambient Temperature Alarm	Y	Y
	Low Battery	Y	Y
	Sensor Failure alarm	Y	Y
	USB Interface	Y	Y
	Door Heating	Y	Y
	Porthole	Y	Y
	Universal Wheel	Y	Y
	Caster		